

Eagle Eye CMVR


Cloud Video Surveillance

WHAT IS THE EAGLE EYE CLOUD VMS?

The Eagle Eye Security Camera VMS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.

FULLY MOBILE

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



GOT CLOUD?

Eagle Eye Networks provides a cloud based, video management system. The Eagle Eye Bridge is installed on-site, connects to your cameras, records video locally, and then securely synchronizes both video and meta data to the Eagle Eye Cloud Data center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

COMPREHENSIVE CAMERA SUPPORT

At Eagle Eye Networks we believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Eagle Eye Bridges and CMVRs support ONVIF Profile S IP cameras. Eagle Eye Combo Bridges and CMVRs support IP as well as NTSC and PAL analog cameras. For an up to date list of all compatible cameras visit www.een.com/cameras.

WORRY FREE MANAGEMENT

All of the software in the Eagle Eye Cloud and firmware on the Eagle Eye Bridge is managed and updated by Eagle Eye Networks. The hardware is fully backed by Eagle Eye with full replacement if anything ever goes wrong.

SECURITY SIMPLIFIED

With Eagle Eye Complete Privacy Encryption™, video is fully encrypted during transmission and at rest. The Eagle Eye Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.

225
325



The Eagle Eye CMVR 225 and 325 family has a rugged, aluminum enclosure with integrated heat fins. It has 4 remotely managed PoE camera ports and is designed for demanding industrial applications. This fanless design makes no noise and has a wide operational temperature range. It directly supports 4 cameras on the integrated PoE ports and a total of 6 or 12 HD IP cameras with an additional ethernet switch.

RECORDING FEATURES

- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Full frame rate on 720p & 1080p cameras
- Optional audio recording


WEB INTERFACE & MOBILE FEATURES

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

SYSTEM ADMINISTRATION

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management



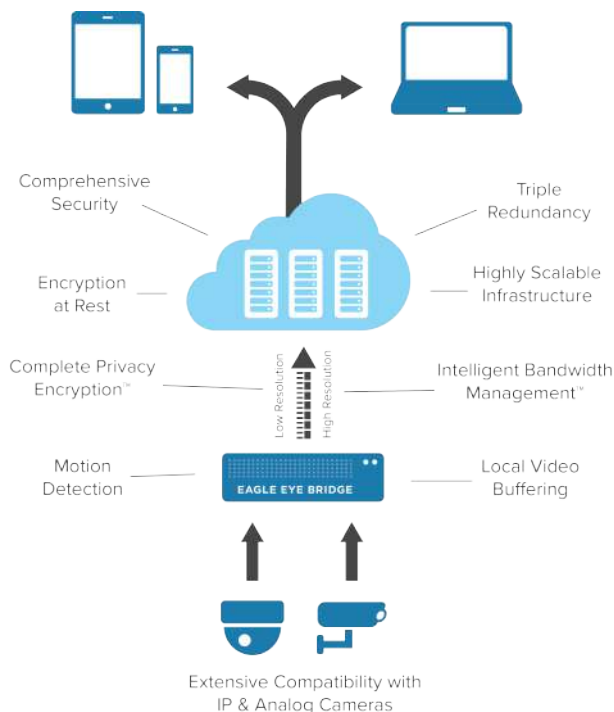

CMVR FEATURES

NETWORK FEATURES

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

MANAGEMENT FEATURES

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed

STANDARD SUPPORT (Included)

- Free of charge with an active subscription
- 24/7 email and web support
- 8 am to 6 pm phone support



RAPID REPLACEMENT (Optional, Recommended)

Eagle Eye's comprehensive program for hardware warranty and upgrades

- Extends warranty up to 20 years
- 24/7 priority support via phone, email and web
- Overnight cross shipping of warranty replacement if needed
- Full equipment upgrade every 6 years up on request

MODEL	CMVR 225	CMVR 325
Number of Cameras	6 HD IP Cameras	12 HD IP Cameras
Storage	1 TB 30 days at HD resolution	2 TB 30 days at HD resolution
Network Ports	WAN: Gigabit CamLAN: 4 PoE Switch	WAN: Gigabit CamLAN: 4 PoE Switch
PoE Switch	4-port 802.3at (up to 4 Class 3 devices)	4-port 802.3at (up to 4 Class 3 devices)
Local Video Connectors	Display Port™ & HDMI®	Display Port™ & HDMI®
Mount	Wall Mount	Wall Mount
Power Supply	External Power Supply	External Power Supply
Power	100-240 VAC 50/60 Hz 12-90 Watts	100-240 VAC 50/60 Hz 12-90 Watts
Size	14.5 x 13 x 7.5 cm 5 3/4" x 5 1/4" x 3"	14.5 x 13 x 7.5 cm 5 3/4" x 5 1/4" x 3"
Weight	2 kg 4.5 lbs	2 kg 4.5 lbs
Temperature Range	0-40° C 32-104° F	0-40° C 32-104° F
Humidity Range	0-70%	0-70%
Safety Certifications	UL, CE, PSE, CB, TIS	UL, CE, PSE, CB, TIS
Rapid Replacement Part Number	EN-RR225-1 (Monthly) EN-RR225-12 (Yearly)	EN-RR325-1 (Monthly) EN-RR325-12 (Yearly)