

## Eagle Eye Cloud VMS

#### WHAT IS THE EAGLE EYE CLOUD VMS?

The Eagle Eye Security Camera VMS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.

#### FULLY MOBILE

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



#### GOT CLOUD?

Eagle Eye Networks provides a cloud based, video management system. The Eagle Eye Bridge is installed onsite, connects to your cameras, records video locally, and then securely synchronizes both video and meta data to the Eagle Eye Cloud Data center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

#### **COMPREHENSIVE CAMERA SUPPORT**

At Eagle Eye Networks we believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Eagle Eye Bridges and CMVRs support ONVIF Profile S IP cameras. Eagle Eye Combo Bridges and CMVRs support IP as well as NTSC and PAL analog cameras. For an up to date list of all compatible cameras visit www.een.com/cameras.

#### WORRY FREE MANAGEMENT

All of the software in the Eagle Eye Cloud and firmware on the Eagle Eye Bridge is managed and updated by Eagle Eye Networks. The hardware is fully backed by Eagle Eye with full replacement if anything ever goes wrong.

#### SECURITY SIMPLIFIED

With Eagle Eye Complete Privacy Encryption<sup>TM</sup>, video is fully encrypted during transmission and at rest. The Eagle Eye Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.

# Eagle Eye320Rack CMVR330420430



The Eagle Eye Cloud Managed Video Recorder (CMVR) stores video and acts as a gateway from your premises to the Eagle Eye Cloud Data Center where your video can also be stored and managed by the Eagle Eye Cloud VMS. It provides video storage, video buffering, a secure connection, bandwidth management, and monitoring of cameras.

These 1U rack-based CMVRs are designed to fit in standard equipment rack. The rack mount CMVRs are offered in a range of sizes to support larger camera counts. Versions are available with analog camera interfaces to allow direct connection of existing NTSC and PAL cameras. Versions are also available with integrated POE ports for direct connection of IP cameras.

#### **RECORDING FEATURES**

- · Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording


#### WEB INTERFACE & MOBILE FEATURES

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

#### SYSTEM ADMINISTRATION

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management

### Eagle Eye CMVR 320 / 330 / 420 / 430

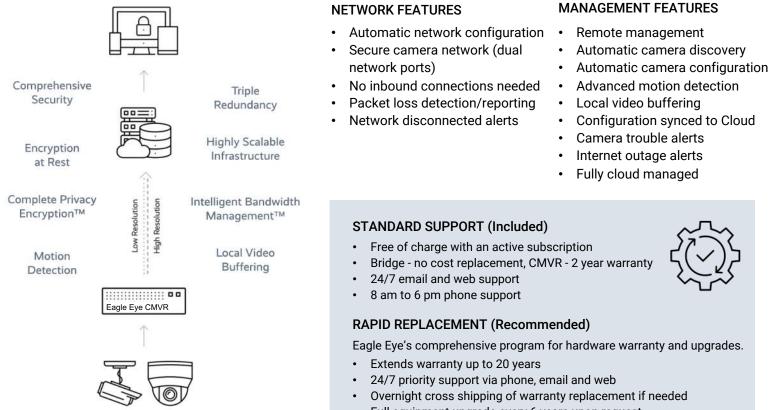

· Full equipment upgrade every 6 years upon request

MODEL	CMVR 320	CMVR 330	CMVR 420	CMVR 430
Max Cameras*	Up to 20 IP Cameras @4MP	8 Analog (NTSC/PAL) or up to 20 IP Cameras @4MP	Up to 35 IP Cameras @4MP	16 Analog (NTSC/PAL) or up to 35 IP Cameras @4MP
Max Analytic Count*	5	5	10	10
Storage Capacity	4 TB 35 days for 20 cameras @ 1MP	4 TB 35 days for 20 cameras @ 1MP	10 TB 50 days for 35 cameras @ 1MP	10 TB 50 days for 35 cameras @ 1MP
Network Ports	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit
Video Output	VGA (1), DVI (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)
Dimension	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U
Maximum Power Consumption	Internal 100-240 VAC, 65 W	Internal 100-240 VAC, 55 W	Internal 100-240 VAC, 50 W	Internal 100-240 VAC, 110 W
Operating Temperature Range	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F
Operating Humidity Range	0-70%	0-70%	0-70%	0-70%
Certifications	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)
Rapid Replacement Part Numbers	EN-RR320-1 (Monthly) EN-RR320-12 (Yearly)	EN-RR330-1 (Monthly) EN-RR330-12 (Yearly)	EN-RR420-1 (Monthly) EN-RR420-12 (Yearly)	EN-RR430-1 (Monthly) EN-RR430-12 (Yearly)

\* Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity

LEARN MORE Visit our website EEN.COM NORTH AMERICA +1-512-473-0500 sales@een.com LATIN AMERICA/CARIBBEAN +52 55 8526 4926 LATAMsales@een.com EUROPE +31 20 26 10 460 EMEAsales@een.com ASIA-PACIFIC +81-3-6868-5527 APACsales@een.com