




The Eagle Eye DB11 is a 4 Megapixel camera with an IP67 environmental rating. This model is suitable for indoor and outdoor use for a wide range of applications. The camera comes pre-configured to securely operate with the Eagle Eye Cloud VMS and Eagle Eye CameraManager.

Key Features

- > 4 Megapixel
- > Indoor/Outdoor Waterproof Bullet
- > Durable All-Aluminum Housing, IP67
- > Motorized Lens, 2.7-13.5mm
- > Wide Dynamic Range
- > Night Vision Smart IR, IR LEDs, 40m range
- > Triple RTSP Streams

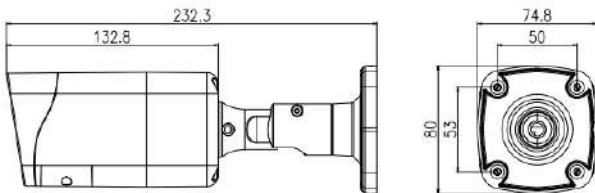

Eagle Eye Part Numbers

EN-CDUB-011a	Eagle Eye Camera DB11 Indoor/Outdoor Bullet 4MP, H265, IR, IP67, 2.7mm-13.5mm Moto Lens, WDR
EN-PRC01	Eagle Eye Camera Rapid Replacement
EN-CABX-007	Eagle Eye Camera Junction Box BX007 (DB11, DB13)
EN-CAPM-001	Eagle Eye Camera Pole Mount PM001 (BX002, BX003, BX004, BX006, BX007)

Camera

Pixels	4 MP
Resolutions	2592×1520/2560×1440/2304×1296/ 1920×1080/1280×720 @25/30fps
Lens	2.7 – 13.5mm motorized lens
Night Vision	Smart IR LEDs, 40m range (131ft)
Field of View	34.3° – 103°
Dynamic Range	WDR (120DB) and HLC/BLC
Digital Noise Reduction	2D/3D DNR and defog
Digital Image Stabilization	Automatic
Applications	Best for modest outdoor areas or large indoor areas: Small Parking lots, fields, parking garages, work yards, back yards, outdoor entrances, warehouses
Image Sensor	1/2.8" progressive scan CMOS
Iris	Fixed
Shutter Speed	1/5s to 1/20000s
Min Illumination	Color 0.05 Lux; IR on 0 Lux

Digital Capabilities

Video Compression	H.265, H.264, and MJPEG
Image Settings	Rotation, saturation, brightness, contrast, sharpness
Corridor Mode	Yes

Setup

Eagle Eye Cloud VMS	Preconfigured with secure password, plug and play
Camera Settings	Fully integrated with Eagle Eye Cloud VMS and Eagle Eye CameraManager
Cyber Secure	Eagle Eye Verified

Interface

Ethernet	Waterproof RJ-45 female 10/100Base-T
Audio	None
BNC Output	Built-in CVBS output

Physical/Power

Power	DC 12V/Power Over Ethernet (IEEE 802.3af)
Power Consumption	3.5W IR off, 8W IR on
Operating Temperature	-30°C to +50°C (-22°F to 122°F)
Operating Humidity	0% – 90% RH
Ingress Rating	IP67
Approvals	CE/FCC
Dimensions	Φ 232 x 74.8 x 80mm (9.13 x 2.94 x 3.15in)
Weight	700g (24.69oz)
Housing	All Aluminum