




Eagle Eye Camera DB15

4MP Full Color AI-ISP Varifocal Bullet

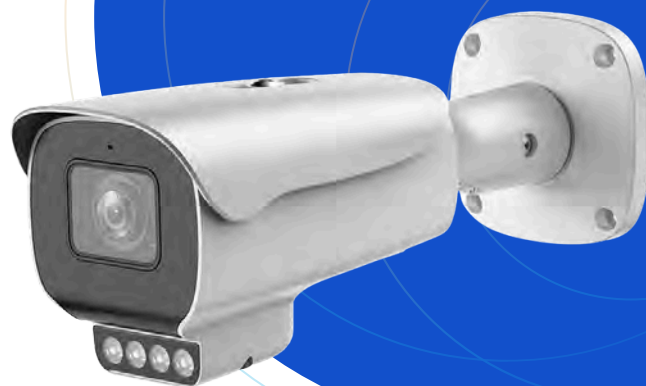

CAMERA

Pixels	4 MP
Resolutions	2688 × 1520 (4MP) at up to 25/30 fps
Lens	Motorized varifocal, auto-focus
LED Illumination Range	-015a: up to 60 m (196.9 ft.) -015b: up to 40 m (131.2 ft.)
Pan/Tilt/Rotation Range	Pan: 0–360°, Tilt: 0–90°, Rotation: 0–360°
Dynamic Range	True WDR (120 dB)
Digital Noise Reduction	2D / 3D DNR
Digital Image Stabilization	Automatic
Applications	Built to support Brivo Eagle Eye LPR applications, an excellent choice for Gate or Street deployments for vehicle speed up to 40 MPH or 60 KPH
Image Sensor	1/1.8" STARVIS™ Progressive Scan CMOS
Iris	Auto
Shutter Speed	1/5 – 1/50,000 s
Min Illumination	Color: 0.0001 Lux @ F1.0 (AGC on); 0 Lux with illuminator on

DIGITAL CAPABILITIES

Video Compression	H.265, H.265 / H.264 / MJPEG, Smart Encoding H.264, and MJPEG
Image Settings	Brightness, sharpness, contrast, saturation
Corridor Mode	Yes

SETUP

Brivo Eagle Eye Video	Preconfigured with secure password, plug and play.
Camera Settings	Fully integrated with Brivo Eagle Eye Video
Subscription	Single camera subscription

INTERFACE

Ethernet	1 × RJ-45 (10/100 Base-T)
Audio	1ch input, 1ch output; built-in microphone and speaker


PHYSICAL/POWER

Power	12 VDC (-15% to +25%) / PoE (IEEE 802.3af)
Power Consumption	Typical: 3.5 W (12 VDC) / 4.7 W (PoE) Max: 9 W (12 VDC) / 11.3 W (PoE)
Operating Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Operating Humidity	Less than 95% RH
Ingress Protection	IP66
Approvals	CE, FCC; NDAA and TAA compliant
Dimensions	303 × 100 × 107 mm (11.9 × 3.94 × 4.21 in.)
Weight	0.82 kg (1.81 lbs)
Housing	Aluminum alloy + plastic

Brivo Eagle Eye DB15 will be the recommended camera for ultra-low-light, outdoor, and perimeter applications. The camera features long-range, color nighttime identification for demanding perimeter and outdoor applications.

Key Features

- Full-color night vision with built-in warm-light illuminators, up to 60 m (-015a) / 40 m (-015b)
- AI-ISP tuned for low light color reproduction
- Motorized varifocal lens — telephoto 8–32 mm (-015a) or wide 4.5–8 mm (-015b)
- Built-in microphone and speaker, plus audio and alarm I/O
- IP66 weatherproof; -40°C to 60°C operating range

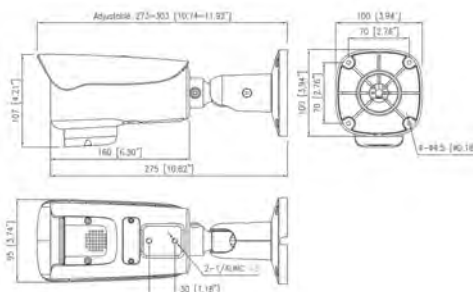

BRIVO PART NUMBERS

EN-CDUB-015a	Eagle Eye Camera DB15 4MP Full Color Varifocal Bullet 8-32mm, NDAA/TAA, Warm Light 60m, AI, Audio I/O, Alarm I/O, POE, WDR, Mic, Spkr, SDCard, IP66
EN-CDUB-015b	Eagle Eye Camera DB15 4MP Full Color Varifocal Bullet 4.5-8mm, NDAA/TAA, WarmLight 40m, AI, Audio I/O, Alarm I/O, POE, WDR, Mic, Spkr, SDCard, IP66
EN-RRC01	Eagle Eye Extended Warranty and Rapid Replacement
EN-CABX-004	Eagle Eye Camera Junction Box
EN-CAPM-002	Eagle Eye Camera Pole Mount
EN-CACM-002	Eagle Eye Camera Corner Mount

Contact us at brivo.com or call us at 866.692.7486 to learn more.